



Wöhr EasyPark

The ultimate parking aid for easy access to your narrow parking space

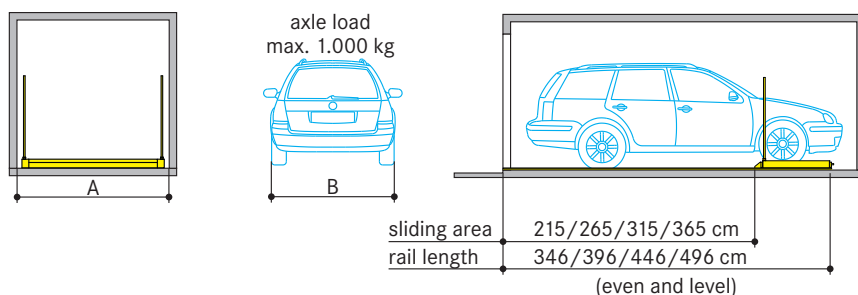

clear car park width A	max. track and tyre width B	e.g. for the following car models, subject to the tyres
165 cm	140 cm	Daihatsu Cuore; Rover Mini
175 cm	150 cm	Fiat Seicento; Smart; Suzuki Alto
185 cm	160 cm	Ford Ka; Mazda 121; Opel Corsa; VW Lupo, Polo
195 cm	170 cm	Audi A2; Ford Focus; Opel Astra; VW Golf
205 cm	180 cm	Audi A4, A6; BMW 3 and 5 series; VW Passat
215 cm	190 cm	Audi A8; BMW 7 series

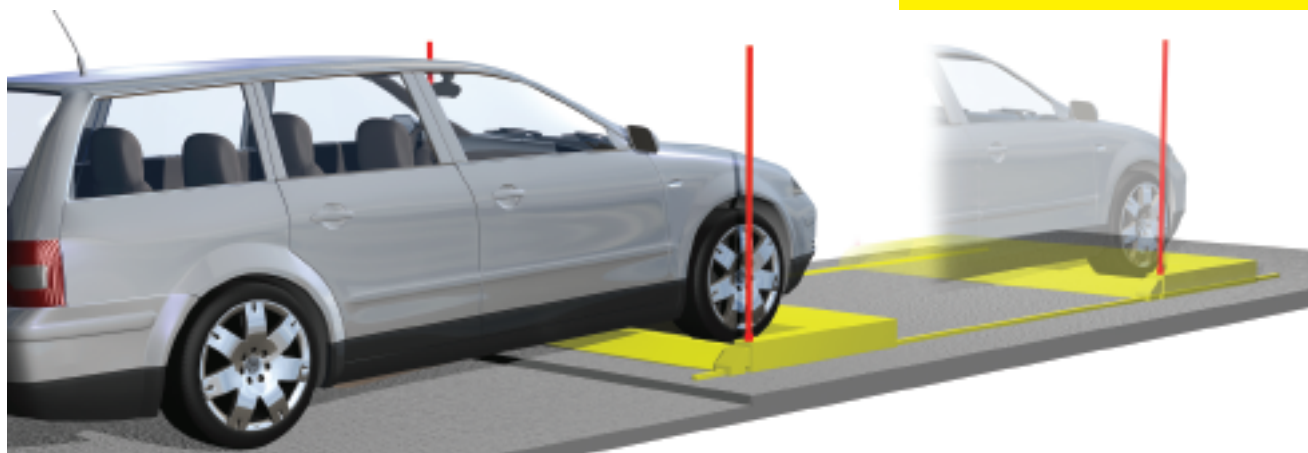

How to park the car

The car has to be parked so that its front wheels are positioned into the tyre indent, place in first gear (automatic transmission P-position). Cars with rear wheel drive have to be backed into the tyre indent.

4 wheel drive vehicles can not be parked.

Maximum axle load 1.000 kg.

Customer's responsibility

Electrical mains supply to the car park space 230 V, AC, fuse or automatic circuit breaker for 16 A slow blow. Lockable main switch in the feed line (above the operating device, in a height of 180 cm).

Even and level floor, suitable to be fixed by dowels to a depth of approx. 8 cm).

Operation

Operation by a control unit with key. By turning the key, EasyPark moves into or out of the parking space. By releasing the key the movement stops immediately. The control unit can be provided with a flexible cable link.

Access

