Data Sheet Wöhr Parklift 440

Single unit = 2 cars

short version

For permanent use only!

Both platforms are in a horizontal position to drive on.

Load per platform max. 2000 kg (load per wheel max. 500 kg)

X = only applicable if garage doors are to be fitted. For roller doors x = 10 / 15 cm

X = to be clarified with door supplier

Dimensions in cm

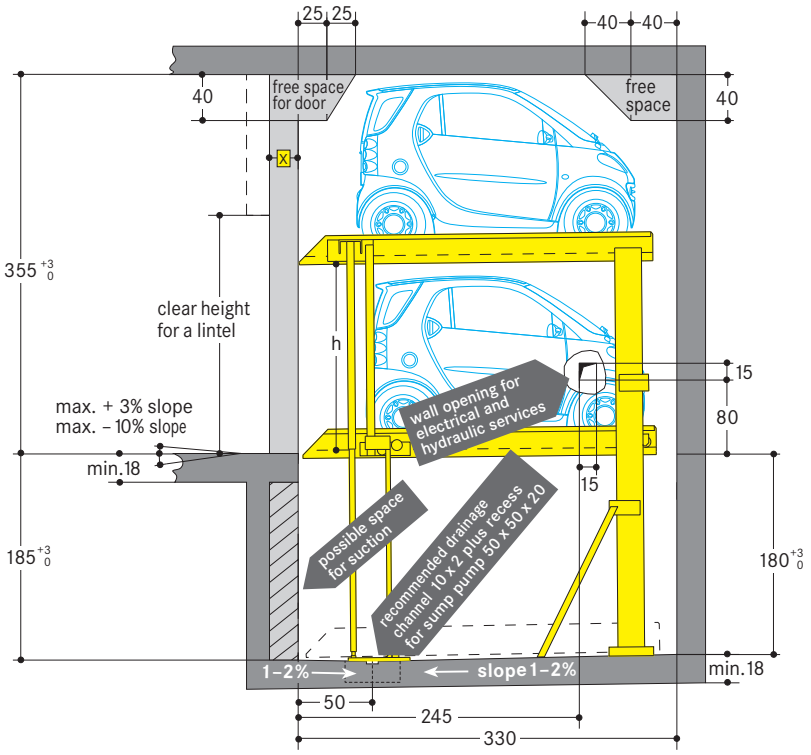

Examples

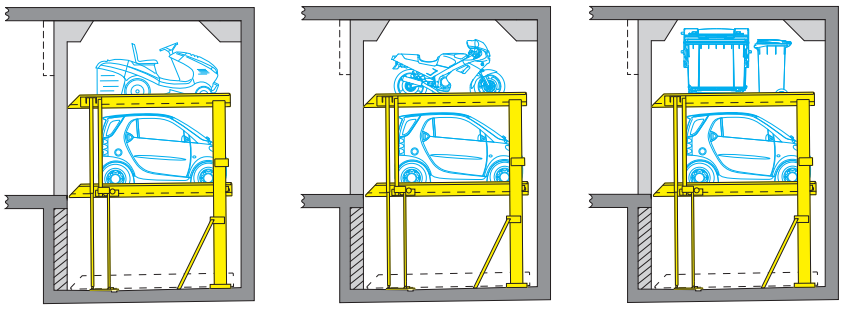

Upper and **lower level** for cars up to 165 cm height, 300 cm length and 160 cm width (town cars, motor cycles, small utility vehicles e.g. lawnmowers).
Platform distance h = 170 cm.

Width dimensions

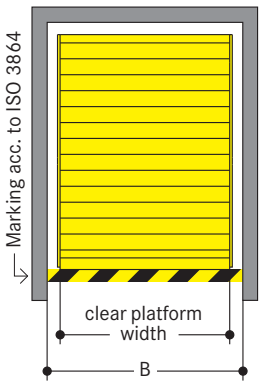

Space required B	gives clear platform width
230	200
240	210
250	220
260	230

Clearance profile

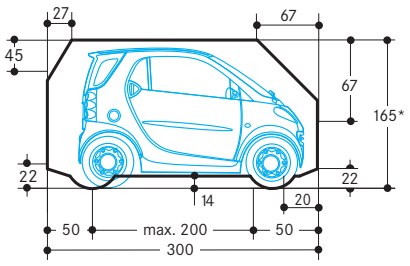

* The total car height includes roof rail and antenna fixture and must not exceed the mentioned max. height dimension.

Notes

1. **For further technical details see data sheet Parklift 440.**
2. Statics and construction requirements can be requested at Wöhr Agent.
3. At the edge of the pit a 10 cm wide, yellow-black marking according to ISO 3864 has to be provided by the purchaser (see “Width dimensions”).
4. It is not possible to have channels or undercuts and/or concrete haunches along the pit floor-to-wall joints. In the event that channels or undercuts are necessary, the system width needs to be reduced or the pit needs to be wider.
5. The manufacturer reserves the right to modify or alter above specifications.

Parklift 440 short version | 05.2010 | C027-4141 | © Otto Wöhr GmbH

Otto Wöhr GmbH
Auto-Parksysteme
P. O. Box 1151
71288 Friolzheim
Fon +49 [0] 7044 46-0
Fax +49 [0] 7044 46-149
www.woehr.de
info@woehr.de

We compact parking space